

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 006 400 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
07.06.2000 Bulletin 2000/23

(51) Int. Cl.⁷: G03B 21/62, G02B 3/08

(21) Application number: 99123273.7

(22) Date of filing: 30.11.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 02.12.1998 JP 34279598

(71) Applicant: KURARAY CO., LTD.
Kurashiki-City Okayama Prefecture 710 (JP)

(72) Inventors:
• Onishi, Ikuo
Tsukuba-shi, Ibaraki (JP)
• Kumagai, Yoshihiro,
Kuraray Co., Ltd.
Kitakanbara-gun, Niigata (JP)
• Matsuzaki, Ichiro
Chuo-ku, Tokyo (JP)

(74) Representative:
VOSSIUS & PARTNER
Siebertstrasse 4
81675 München (DE)

(54) Optical device and fresnel lens sheet

(57) Provided is an optical device through which the angle of light passing and going out has little wavelength dependency and which is well applicable to Fresnel lenses with little coloration of light passing through it. The optical device has a diffraction grating formed on one surface and capable of diffracting rays of light incident thereon, and has a refracting member (e.g., a Fresnel lens) formed on the other surface opposite to the diffraction grating and capable of refracting the dif-

fracted rays of light from the diffraction grating to make the refracted rays of light go out of it, in which the wavelength dependency of the diffractive angle of the main rays diffracted by the diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by the refracting member, or that is, the former wavelength dependency is opposite to and cancels out the latter one.


Fig. 1

2. Fresnel Lens Sheet

1. Lenticular Lens Sheet

4. Diffraction Grating

3. Fresnel Lens

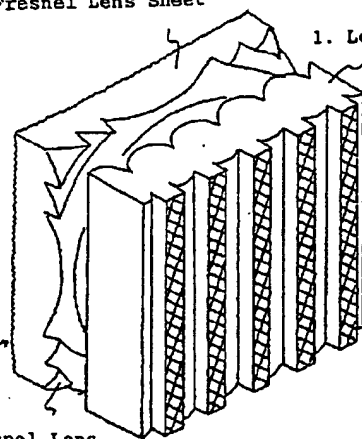

EP 1 006 400 A2

AL

Description

[0001] The present invention relates to an optical device and a Fresnel lens sheet comprising it.

[0002] Fig. 10 is a schematic view showing the outline of the constitution of a conventional rear projection display.

5 As illustrated, the conventional rear projection display comprises a projection tube 11 which projects an optical image, a projection lens 12 which magnifies the optical image from the projection tube 11, and a rear projection screen 13 which forms thereon the optical image having been magnified through the projection lens 12. A person P views the optical image having been projected, magnified and formed on the rear projection screen 13.

[0003] In many cases of the rear projection display of that type, the screen 13 has a two-sheet structure composed
10 of a Fresnel lens sheet 14 which gathers the beams of light from the projection tube 11 toward the viewer, and a lenticular lens sheet 15 which disperses the light having passed through the Fresnel lens sheet 14 in the direction horizontal to the screen (that is, in the direction of the width of the screen) and in the direction vertical thereto (that is, in the direction of the height of the screen) at a predetermined angle in a suitable ratio to thereby enlarge the angle of visibility to be in a predetermined range.

15 [0004] In that type of rear projection display equipped with a rear projection screen, the projection lens 12 and the screen 13 are desired to be so disposed that the distance therebetween is shorter so as to reduce the thickness of the display. It is also desired to increase the luminance around the peripheral area of the screen. To meet the requirements, the Fresnel angle in the peripheral area of the Fresnel lens sheet 14 must be enlarged. On the other hand, in general, the refractive index of the material that forms the Fresnel lens surface of the Fresnel lens sheet has wavelength dependency. Therefore, the angle of light passing through the Fresnel lens shall vary, depending on the wavelength of the light.
20 With the Fresnel angle increasing, the difference in the angle of light passing through the Fresnel lens shall increase, depending on the difference in the wavelength of the light. As a result, the light having reached the screen is colored to degrade the quality of the image formed on the screen. Accordingly, it is difficult to solve the problem with thinned rear projection displays only by enlarging the Fresnel angle in the peripheral area of the Fresnel lens sheet.

25 [0005] Given that situation, we, the present inventors have completed the present invention with its object to provide an optical device through which the angle of light passing and going out has little wavelength dependency and which is well applicable to Fresnel lenses with little coloration of light passing through it.

[0006] The optical device of the invention to solve the problem noted above has a diffraction grating formed on one surface and capable of diffracting rays of light incident thereon, and has a retracting member formed on the other surface opposite to the diffraction grating and capable of retracting the diffracted rays of light from the diffraction grating to make the refracted rays of light go out of it, in which the wavelength dependency of the diffractive angle of the main rays diffracted by the diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by the retracting member, or that is, the former wavelength dependency is opposite to and cancels out the latter one. Other optical device of the invention to solve the problem noted above has a refracting member formed on one surface and capable of refracting rays of light incident thereon, and has a diffraction grating formed on the other surface opposite to the refracting member and capable of diffracting the refracted rays of light from the refracting member to make the diffracted rays of light go out of it, in which the wavelength dependency of the diffractive angle of the main rays diffracted by the diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by the refracting member, or that is, the former wavelength dependency is opposite to and cancels out the latter one. In
30 the optical devices, the refracting member may be of a Fresnel lens to give a Fresnel lens sheet.

[0007] In the invention, the diffraction grating may be formed on the refracting member. Specifically, the optical device of this embodiment of the invention has a refracting member formed on one surface and capable of refracting rays of light incident thereon to give refracted rays of light going out of it, and has a diffraction grating formed on the refracting member, in which the wavelength dependency of the diffractive angle of the main rays diffracted by the diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by the refracting member. In the optical device of this embodiment, the refracting member may be also of a Fresnel lens to give a Fresnel lens sheet. In another embodiment of the invention, the diffraction grating and the refracting member of, for example, a Fresnel lens may be formed in different sheets. Specifically, in this embodiment, the diffraction grating sheet with a diffraction grating capable of diffracting rays of light incident thereon may be combined with the Fresnel lens sheet with a Fresnel lens capable of refracting the diffracted rays of light from the diffraction grating sheet to give refracted rays of light going out of it, in such a manner that the wavelength dependency of the diffractive angle of the main rays diffracted by the diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by the Fresnel lens sheet.

[0008] As a rule, light is refracted through the interface between air and a substance, satisfying the following equation for which the refractive index of air is 1 (one):
35

$$\sin(\theta_{\text{out}}) = n \cdot \sin(\theta_{\text{in}}) \quad (1)$$

wherein θ_{in} indicates the angle of the light coming in the substance; θ_{out} indicates the angle of the light going out of the substance; and n indicates the refractive index of the material forming the substance.

[0009] The refractive indices n_R , n_G and n_B of an ordinary Fresnel lens to red light (R), green light (G) and blue light (B), respectively, from a light source are generally in the following order:

$$n_R < n_G < n_B \quad (2).$$

[0010] From the formula (1) above, therefore, the angles θ_R , θ_G and θ_B of the red light, the green light and the blue light, respectively, going out of the Fresnel lens shall be in the following order:

$$\theta_R < \theta_G < \theta_B \quad (3).$$

[0011] Accordingly, as in Fig. 9A showing one model of an ordinary Fresnel lens, the angles of different rays of light going out of the Fresnel lens vary, depending on the wavelength of each ray. The wavelength dependency of rays of light passing through the Fresnel lens causes coloration of the projection screen combined with the Fresnel lens sheet and greatly degrades the quality of images formed on the screen.

[0012] As a rule, light passes through a diffraction grating, satisfying the following equation:

$$\sin(\theta_{out}) = \sin(\theta_{in}) + m\lambda/P \quad (4)$$

wherein P indicates the pitch of the diffraction grating; λ indicates the wavelength of the light coming in the diffraction grating; θ_{in} indicates the angle of the incoming light; θ_{out} indicates the outgoing light; and m indicates the grading order of the diffraction grating.

[0013] In that condition, the wavelengths of the incoming red light, green light and blue light represented by λ_R , λ_G and λ_B , respectively, are in the following order:

$$\lambda_R > \lambda_G > \lambda_B \quad (5).$$

Therefore, when $m > 0$,

$$\phi_R > \phi_G > \phi_B \quad (6)$$

wherein ϕ_R , ϕ_G and ϕ_B indicate the diffractive angles of the red light, the green light and the blue light, respectively.

[0014] Accordingly, as in Fig. 9B where a diffraction grating is formed on one surface (back surface) of a device opposite to the Fresnel lens, the diffraction grating acts on the Fresnel lens in such a manner that the wavelength dependency of the diffractive angles of rays of light passing through the diffraction grating cancels out the wavelength dependency of the refractive angles of those rays of light passing through the Fresnel lens. Therefore, in the illustrated device, the wavelength dependency of the outgoing angles of rays of light going out of the Fresnel lens is thereby canceled to reduce the coloration of image-forming screens.

Fig. 1 is a perspective view showing the outline of one embodiment of a rear projection screen comprising the Fresnel lens sheet of the invention.

Fig. 2 is a perspective view showing the outline of one embodiment of the Fresnel lens sheet of the invention.

Fig. 3 is a view for explaining the grating pitch and the grating height in the Fresnel lens sheet of the invention.

Fig. 4A and Fig. 4B are graphs each showing one embodiment of the grating pitch and the grating height, respectively, in the Fresnel lens sheet of the invention.

Fig. 5 is a perspective view showing the outline of another embodiment of the Fresnel lens sheet of the invention.

Fig. 6 is a cross-sectional view of the Fresnel lens sheet of Fig. 5.

Fig. 7 is a perspective view showing the outline of still another embodiment of the Fresnel lens sheet of the invention.

Fig. 8 is a cross-sectional view of the Fresnel lens sheet of Fig. 7.

Fig. 9A and Fig. 9B are views for explaining the function of the Fresnel lens sheet of the invention.

Fig. 10 is a view showing the outline of the constitution of a conventional rear projection display.

[0015] Fig. 1 is a perspective view showing the outline of a rear projection screen comprising the Fresnel lens sheet of the invention. In the rear projection screen illustrated, a lenticular lens sheet 1 is disposed on the side of a viewer, and a Fresnel lens sheet 2 is on the side of a projection tube (not shown). As in the perspective view of Fig. 2, a diffraction grating 4 is formed on the surface of the Fresnel lens sheet 2 facing a projection tube, while a Fresnel lens 3 is

formed on the other surface thereof through which the light having entered it goes out. The diffraction grating may be formed concentrically with the Fresnel lens so that the center of the former could be the same as that of the latter, as so illustrated in Fig. 2. However, it is not always necessary to make the center of the diffraction grating the same as that of the Fresnel lens. If desired, the centers of the two may be shifted in some degree, depending on the intended light-collecting capabilities of them. Where the diffraction grating is formed concentrically with the Fresnel lens so that the center of the former could be the same as that of the latter, as in the illustrated case, the rays of light from a projection tube to enter the diffraction grating are so diffracted that they run in the direction of the center of the sheet. With that constitution, therefore, the rays of light having entered the sheet can be two-dimensionally collected through the sheet to thereby increase the luminance of the projection screen combined with the sheet. The Fresnel lens sheet may be produced, for example, by forming a diffraction grating on one surface of a transparent plastic sheet to be a substrate, through press molding, followed by forming a Fresnel lens of an ultraviolet-polymerization resin on the other surface thereof in a 2P process.

[0016] The Fresnel lens acts as a convex lens, and refracts the rays of light incident thereon, differently in its center area and peripheral area. In general, it diffracts the rays of light incident thereon, to a higher degree in its peripheral area than in its center area. Concretely, the configuration of the Fresnel lens is so defined that its rising height is larger in its peripheral area having a larger refractive angle than in the other area of the lens. With the Fresnel lens configuration of that type, it is desirable that the pitch of the diffraction grating is varied in the center area and the peripheral area of the Fresnel lens sheet. Since the rays of light incident on the lens sheet are refracted greatly through the sheet, the wavelength distribution of the rays of light having been refracted by the Fresnel lens in the sheet shall be larger in the peripheral area of the sheet than in the center area thereof. In that condition, the pitch of the diffraction grating is made shorter in the peripheral area in which the Fresnel lens has a larger refractive angle thereby making the wavelength dependency of the diffractive angle of the diffraction grating larger in that area so as to cancel out the wavelength distribution of the rays of light having been refracted by the Fresnel lens. When the pitch of the diffraction grating is made varied in the center area and the peripheral area of the Fresnel lens sheet, it is desirable that the varying pitch of the diffraction grating falls between 5 μm and 1000 μm . Within the defined range, the diffracting capabilities of the diffraction grating are not too much strong to give good images with no distortion, and are not too much weak to make the diffraction grating have the intended characteristics.

[0017] The peripheral area of the Fresnel lens sheet for rear projection screens receives the rays of light from a projection tube, in the direction oblique to the sheet. Therefore, the apparent grating height in the sheet shall be larger than the actual grating height therein. Accordingly, in order to unify the diffracting capabilities of the diffraction grating anywhere even in the center area and the peripheral area of the Fresnel lens sheet, the grating height in the peripheral area in which the refractive angle of the Fresnel lens is large must be smaller than in the center area. In this case, it is desirable that the grating height falls between 0.2 μm and 3 μm . If the grating height is smaller than 0.2 μm , the proportion of the diffracted rays of light will be too much small.

[0018] Fig. 3 is a cross-sectional view schematically showing the Fresnel lens sheet of the invention, in which the Fresnel angle of the Fresnel lens and also the grating pitch and the grating height of the diffraction grating are varied depending on the distance from the center of the Fresnel lens. In Fig. 3, P1 and H1 each indicate the grating pitch and the grating height, respectively, in the center area of the Fresnel lens sheet; and P2 and H2 each indicate the grating pitch and the grating height, respectively, in the peripheral area thereof. The Fresnel lens sheet of Fig. 3 shall be in the following conditions, as is understood from Fig. 4A and Fig. 4B.

$$H2 < H1, \text{ and}$$

$$P2 < P1.$$

[0019] Some examples of the Fresnel lens sheet of the invention are shown in Table 1 below, in which the Fresnel angle of the Fresnel lens and also the grating pitch and the grating height of the diffraction grating are varied depending on the distance from the center of the Fresnel lens. These are produced by laminating a 2P resin (thickness: 0.15 mm) on a substrate (thickness: 1.85 mm). The refractive indices of the 2P resin and the substrate to different wavelengths of red, green and blue light are shown in Table 2 below.

Table 1

Radius (mm)	Fresnel Angle (deg.)	Grating Pitch (μm)	Grating Height (μm)
100	14.2	34.7	0.99
200	26.8	25.8	0.97

Table 1 (continued)

Radius (mm)	Fresnel Angle (deg.)	Grating Pitch (μm)	Grating Height (μm)
300	37.0	19.2	0.94
400	44.9	14.4	0.89
500	51.0	11.2	0.85
600	55.8	9.1	0.80

Table 2

Constituent Components		Substrate	2P Resin
Material		Acryl-Styrene Copolymer	Photo-polymerization Acrylic Resin
Refractive Index	wavelength: 470 nm	1.545	1.558
	wavelength: 550 nm	1.537	1.552
	wavelength: 610 nm	1.532	1.549

[0020] Another embodiment of the Fresnel lens sheet of the invention is in Fig. 5 schematically showing the perspective view of the sheet. As illustrated, the Fresnel lens sheet 5 has a diffraction grating 6 formed on one surface opposite to the other surface on which is formed a Fresnel lens 7. In this, the grating is in the horizontal direction of the sheet. Fig. 6 is a cross-sectional view of the Fresnel lens sheet of Fig. 5. In the Fresnel lens sheet of this embodiment, the diffraction grating 6 diffract the rays of light having entered it, in the direction perpendicular to the sheet. With this, therefore, the Fresnel lens sheet could additionally have the action of a lenticular lens sheet, and could reduce the coloration of even the peripheral area of the screen combined with it. Even in this embodiment where the diffraction grating is formed in the horizontal direction of the sheet, the grating pitch and the grating height may be varied depending on the varying refractive indices of the Fresnel lens.

[0021] Still another embodiment of the Fresnel lens sheet of the invention is in Fig. 7 schematically showing the perspective view of the sheet. As illustrated, the Fresnel lens sheet 8 has a diffraction grating 9 formed on the surface of the Fresnel lens 10 of the sheet. Fig. 8 is a cross-sectional view of the Fresnel lens sheet of Fig. 7. The Fresnel lens sheet having the configuration illustrated may be produced in a 2P process utilizing a mold for a Fresnel lens sheet with a diffraction grating pattern on its surface to give the surface of the Fresnel lens. The Fresnel lens sheet having the configuration of that type does not require different steps of separately working the both surfaces of the Fresnel lens sheet in different ways, and its producibility is high.

[0022] As a rule, the rays of light having passed through a diffraction grating go out of it, at scattering angles to be determined by the number of diffraction orders. Where the rays of light having entered a diffraction grating go out of it in a large number of diffraction orders, the diffracted rays are dispersed to lower the luminance from them. Where the diffracted rays of light are concentrated to a specific order, such as those of the primary order, the luminance relative to the outgoing angle of the diffracted rays of light that shall be determined by the diffraction order could be increased. In this case, the cross section of the diffraction grating may have a profile of saw teeth. Utilizing diffracted rays of light falling within a range of different diffraction orders (for example, from primary to pentanary orders) makes it possible to view a screen in different directions. In this case, the cross section of the diffraction grating may have different profiles of sine curves, triangles, rectangles, etc. When the diffraction grating is so configured that the sum of the intensity of the primary-order diffracted rays and that of the zero-order diffracted rays from it is not smaller than 40 % of the total intensity of all diffracted rays including secondary and other higher order rays, it could effectively utilize the light incident thereon to increase the luminance from it.

[0023] Where the Fresnel lens sheet of the invention is applied to a rear projection screen, it may be combined with an ordinary lenticular lens sheet, for example, as in Fig. 10. If desired, a protective front sheet may be attached to the viewer's side of the lenticular lens sheet.

[0024] As described in detail hereinabove, the optical device of the invention has the advantage of little wavelength dependency of the angle of light passing through and going out of it, and is well applicable to Fresnel lenses with little coloration of light passing through it.

[0025] While the invention has been described in detail and with reference to specific embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope thereof.

5 Claims

1. An optical device having a diffraction grating formed on one surface and capable of diffracting rays of light incident thereon, and having a refracting member formed on the other surface opposite to the diffraction grating and capable of refracting the diffracted rays of light from the diffraction grating to make the refracted rays of light go out of it, in which the wavelength dependency of the diffractive angle of the main rays diffracted by said diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by said refracting member.
2. An optical device having a refracting member formed on one surface and capable of refracting rays of light incident thereon, and having a diffraction grating formed on the other surface opposite to the refracting member and capable of diffracting the refracted rays of light from the refracting member to make the diffracted rays of light go out of it, in which the wavelength dependency of the diffractive angle of the main rays diffracted by said diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by said refracting member.
3. An optical device having a refracting member formed on one surface and capable of refracting rays of light incident thereon to give refracted rays of light going out of it, and having a diffraction grating formed on said refracting member, in which the wavelength dependency of the diffractive angle of the main rays diffracted by said diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by said refracting member.
4. A Fresnel lens sheet having a diffraction grating formed on one surface and capable of diffracting rays of light incident thereon, and having a Fresnel lens formed on the other surface opposite to the diffraction grating and capable of refracting the diffracted rays of light from the diffraction grating to make the refracted rays of light go out of it, in which the wavelength dependency of the diffractive angle of the main rays diffracted by said diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by said Fresnel lens.
5. A Fresnel lens sheet having a Fresnel lens formed on one surface and capable of refracting rays of light incident thereon, and having a diffraction grating formed on the other surface opposite to the Fresnel lens and capable of diffracting the refracted rays of light from the Fresnel lens to make the diffracted rays of light go out of it, in which the wavelength dependency of the diffractive angle of the main rays diffracted by said diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by said Fresnel lens.
6. A Fresnel lens sheet having a Fresnel lens formed on one surface and capable of refracting rays of light incident thereon to give refracted rays of light going out of it, and having a diffraction grating formed on said Fresnel lens, in which the wavelength dependency of the diffractive angle of the main rays diffracted by said diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by said Fresnel lens.
7. The Fresnel lens sheet as claimed in any one of claims 4 to 6, wherein the diffraction grating is so configured that its pitch is shorter with the increase in the refractive angle of the Fresnel lens.
8. The Fresnel lens sheet as claimed in claim 7, wherein the diffraction grating pitch falls between $5\text{ }\mu\text{m}$ and $1000\text{ }\mu\text{m}$.
9. The Fresnel lens sheet as claimed in any one of claims 4 to 8, wherein the diffraction grating is so configured that its height is smaller with the increase in the refractive angle of the Fresnel lens.
10. The Fresnel lens sheet as claimed in claim 9, wherein the diffraction grating height falls between $0.2\text{ }\mu\text{m}$ and $3\text{ }\mu\text{m}$.
11. The Fresnel lens sheet as claimed in any one of claims 4 to 10, wherein the diffraction grating is patterned in the concentric direction.
12. The Fresnel lens sheet as claimed in any one of claims 4 to 10, wherein the diffraction grating is patterned in the linear direction.
13. The Fresnel lens sheet as claimed in any one of claims 4 to 12, wherein the diffraction grating is so configured that

EP 1 006 400 A2

the sum of the intensity of the primary-order diffracted rays and that of the zero-order diffracted rays from it is not smaller than 40 % of the total intensity of all diffracted rays including secondary and other higher order rays.

- 5 14. A Fresnel lens sheet to be combined with a sheet having a diffraction grating formed on it and capable of diffracting rays of light incident thereon, the Fresnel lens sheet being characterized in that it has a Fresnel lens formed on it and capable of refracting the diffracted rays of light from the diffraction grating to make the refracted rays of light go out of it, and that the wavelength dependency of the diffractive angle of the main rays diffracted by said diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by said Fresnel lens.

10

15

20

25

30

35

40

45

50

55

Fig. 1

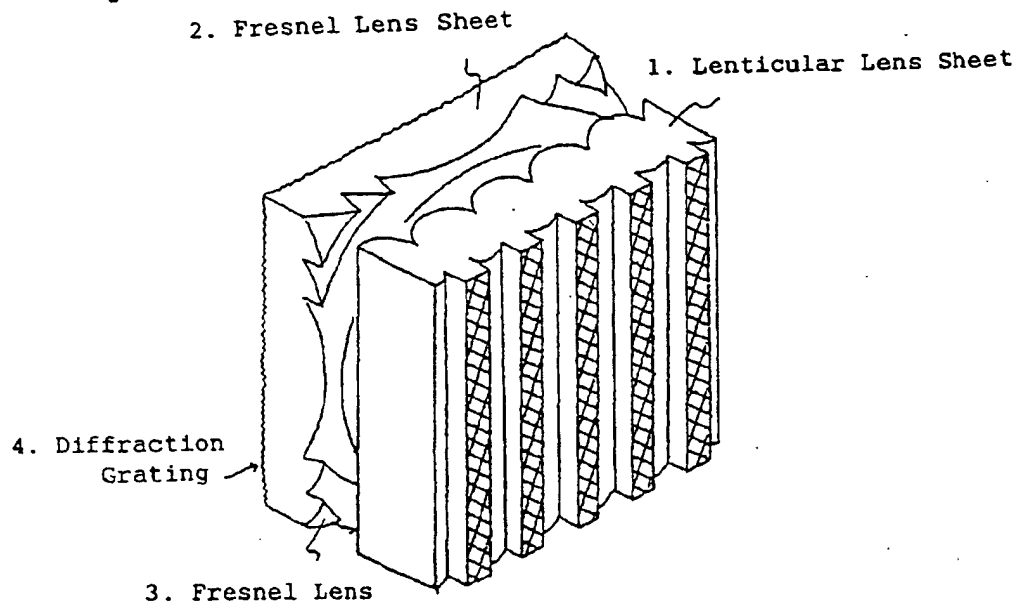


Fig. 2

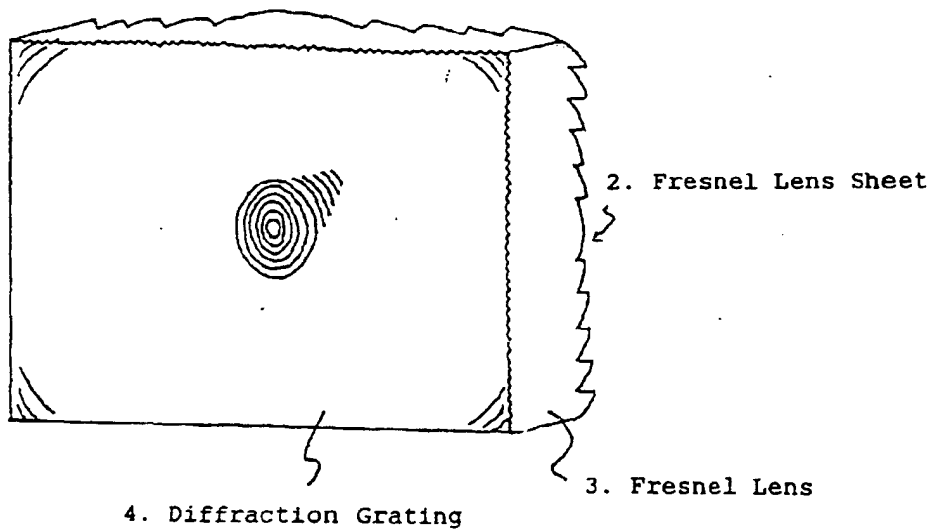


Fig. 3

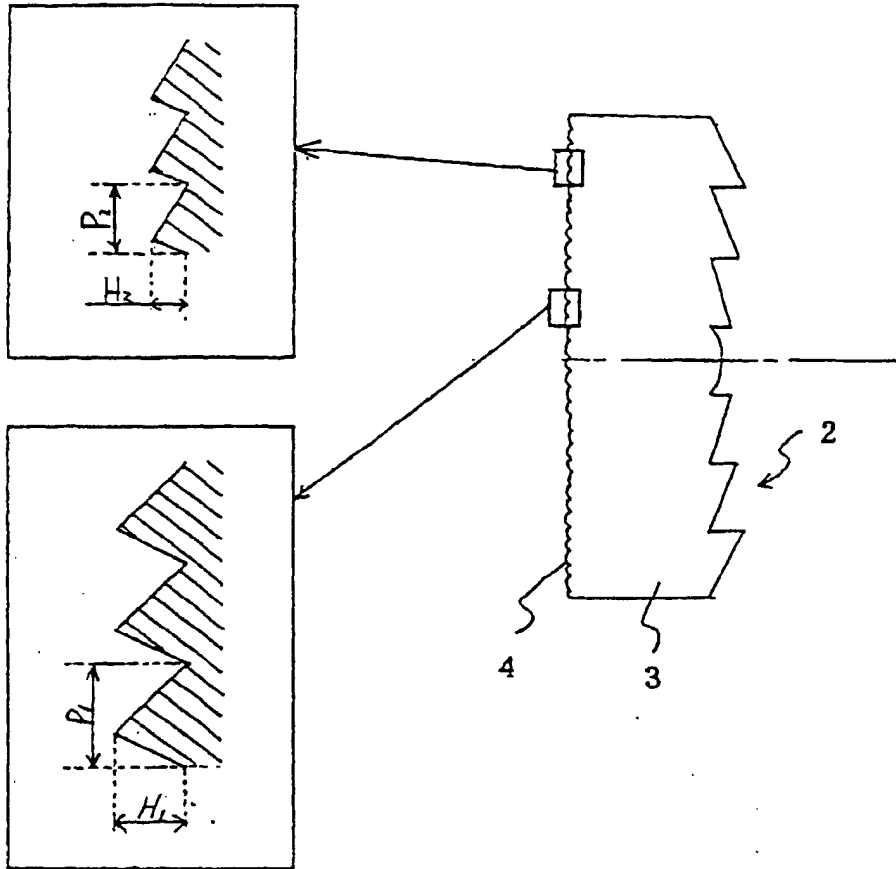


Fig. 4A

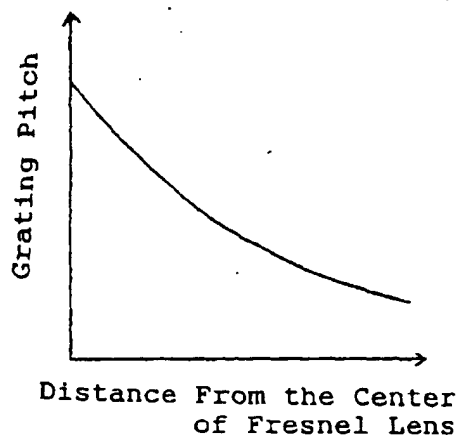


Fig. 4B

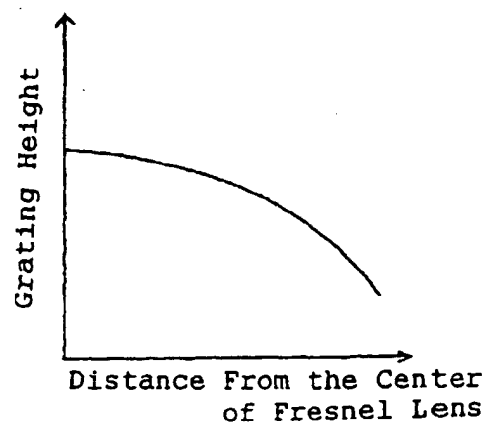


Fig. 5

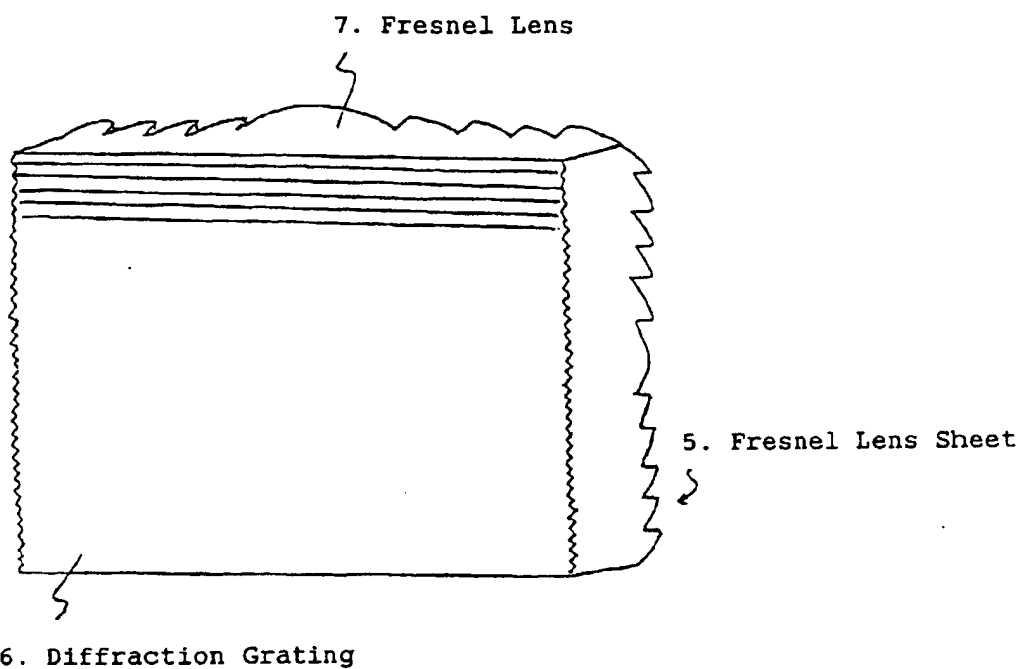


Fig. 6

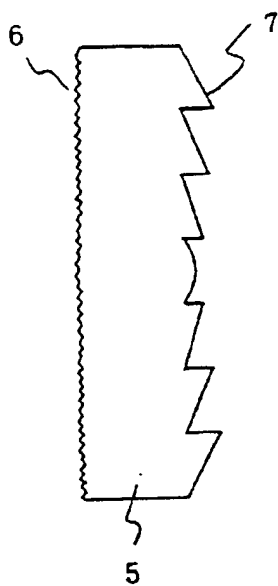


Fig. 7

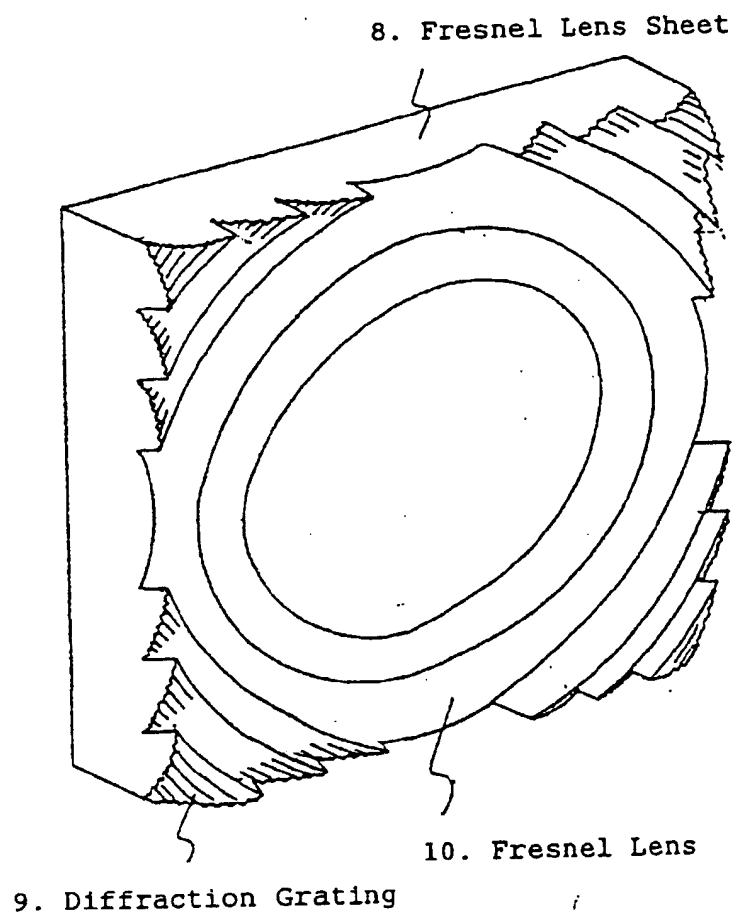


Fig. 8

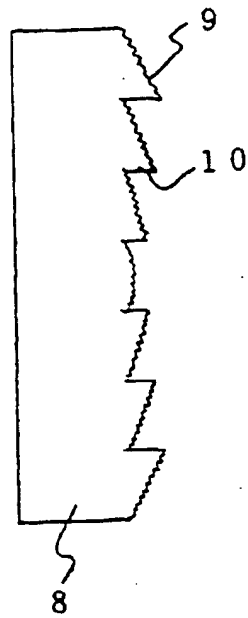


Fig. 9A

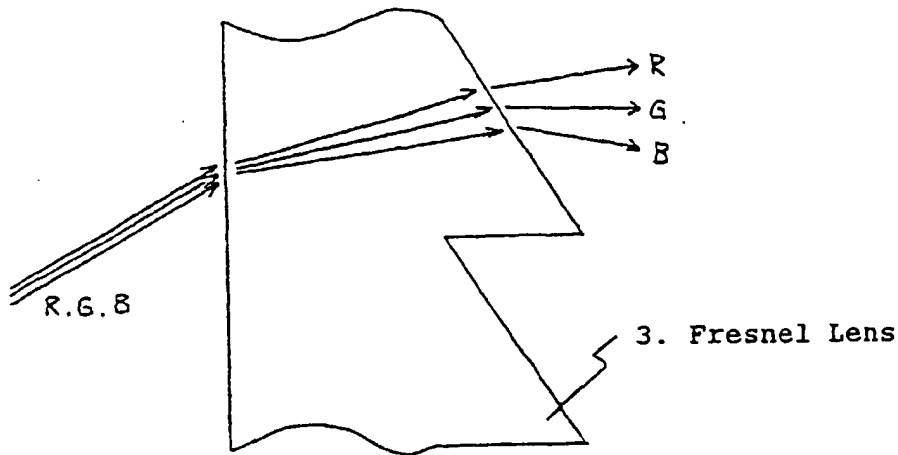


Fig. 9B



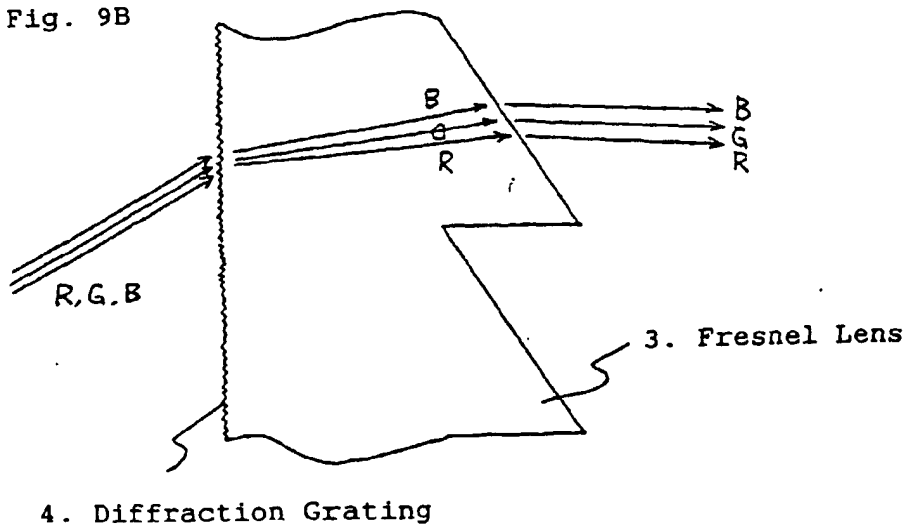


Fig. 10



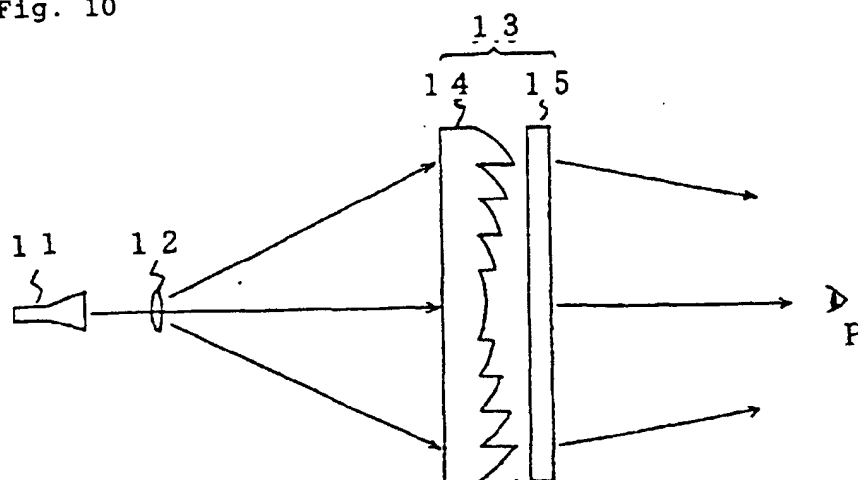

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 006 400 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
14.05.2003 Bulletin 2003/20

(51) Int Cl.7: **G03B 21/62, G02B 3/08,
G02B 5/18, H04N 9/31**

(43) Date of publication A2:
07.06.2000 Bulletin 2000/23

(21) Application number: **99123273.7**

(22) Date of filing: **30.11.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Onishi, Ikuo
Tsukuba-shi, Ibaraki (JP)
• Kumagai, Yoshihiro, Kuraray Co., Ltd.
Kitakanbara-gun, Niigata (JP)
• Matsuzaki, Ichiro
Chuo-ku, Tokyo (JP)

(30) Priority: **02.12.1998 JP 34279598**

(71) Applicant: **KURARAY CO., LTD.**
Kurashiki-City Okayama Prefecture 710 (JP)

(74) Representative: **VOSSIUS & PARTNER**
Siebertstrasse 4
81675 München (DE)

(54) **Optical device and fresnel lens sheet**


(57) Provided is an optical device through which the angle of light passing and going out has little wavelength dependency and which is well applicable to Fresnel lenses with little coloration of light passing through it. The optical device has a diffraction grating formed on one surface and capable of diffracting rays of light incident thereon, and has a refracting member (e.g., a Fresnel lens) formed on the other surface opposite to the diffraction grating and capable of refracting the diffract-

ed rays of light from the diffraction grating to make the refracted rays of light go out of it, in which the wavelength dependency of the diffractive angle of the main rays diffracted by the diffraction grating compensates for the wavelength dependency of the refractive angle thereof refracted by the refracting member, or that is, the former wavelength dependency is opposite to and cancels out the latter one. The fresnel lens sheet is used as part at a rear projection screen.

Fig. 1

2. Fresnel Lens Sheet

1. Lenticular Lens Sheet

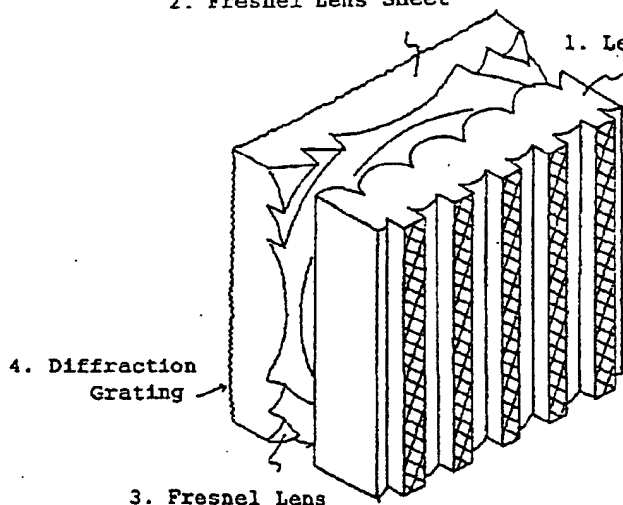

EP 1 006 400 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 12 3273

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 161 057 A (JOHNSON KENNETH C) 3 November 1992 (1992-11-03) * column 1, line 22 - column 2, line 68; figures 1,2,6 *	1-11	G03B21/62 G02B3/08 G02B5/18 H04N9/31
Y	* column 3, line 23-41 * * column 6, line 18-35 * * column 3, line 23-34; figure 2 *	14	
X	US 5 619 373 A (MEYERHOFER DIETRICH ET AL) 8 April 1997 (1997-04-08) * column 2, line 7-10; figures 1,6,7 * * column 3, line 33-45 * * column 6, line 23-29 * * column 7, line 59 - column 8, line 37 * * column 9, line 5-34 *	1-6,13	
A	* column 7, line 59-63; figure 3 * * column 3, line 36-56 *	14	
X	US 5 629 799 A (ISHIKAWA TSUYOSHI ET AL) 13 May 1997 (1997-05-13) * column 1, line 63 - column 2, line 36; figures 1-16 *	1-3	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	* column 8, line 44-58 * * column 32, line 38 - column 33, line 4 * * column 32, line 38 - column 33, line 4; figure 46 *	14	G02B G03B H04N
A	US 2 818 765 A (FOSTER LEON V) 7 January 1958 (1958-01-07) * column 1, line 15 - column 2, line 10; figure 1 *	14	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 14 March 2003	Examiner Andreassen, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.82) (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 12 3273

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-03-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5161057 A	03-11-1992	AU 630890 B2	12-11-1992
		AU 4307489 A	02-04-1990
		CA 1321497 A1	24-08-1993
		DE 68914067 D1	28-04-1994
		DE 68914067 T2	20-10-1994
		EP 0359179 A2	21-03-1990
		ES 2053895 T3	01-08-1994
		IL 91589 A	18-08-1993
		JP 5509171 T	16-12-1993
		WO 9002963 A1	22-03-1990
US 5619373 A	08-04-1997	NONE	
US 5629799 A	13-05-1997	JP 3340489 B2	05-11-2002
		JP 6215409 A	05-08-1994
		JP 3345097 B2	18-11-2002
		JP 6082725 A	25-03-1994
		JP 6242373 A	02-09-1994
		JP 3306170 B2	24-07-2002
		JP 6250081 A	09-09-1994
		JP 7013009 A	17-01-1995
		DE 4323971 A1	17-02-1994
		US 6118597 A	12-09-2000
		US 5914822 A	22-06-1999
		US 5796520 A	18-08-1998
		US 5838497 A	17-11-1998
		US 5969862 A	19-10-1999
		US 5883744 A	16-03-1999
		JP 6331887 A	02-12-1994
US 2818765 A	07-01-1958	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82